


# Roofing Responsibly

*Pure Elegance*

## Specification for Shakes

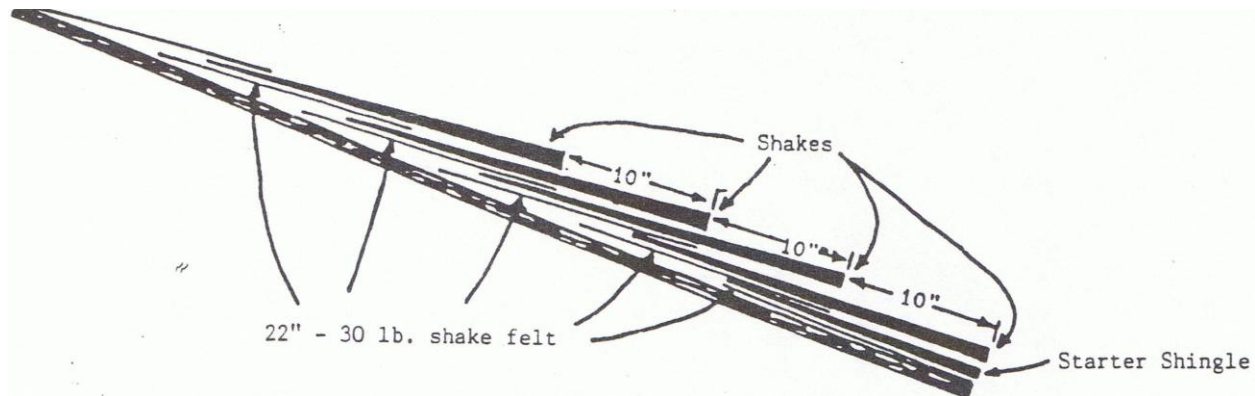

1. Tear off existing shake roof. Dirt and small pieces of debris will fall into the attic and garage. Roofing Responsibly will provide drop cloths to owner but will not be responsible for interior cleaning. All items loosely attached to walls (i.e. clocks, mirrors, . pictures, etc.) should be removed prior to roofing.
2. Replace the sheet metal flashing to all vents and pipe flashing.
3. Replace all valleys with new galvanized 24" valley with at least a 4" overlap.
4. Shakes are to be applied 10" to the weather with a 30# felt inter-layment between each layer of shake. (See diagram)
5. Secure each shake with two 1 3/4" staples applied at random to insure proper penetration into sheathing.
6. Pre-formed hip and ridge shingles will be applied using one galvanized 10-D nail on each side of shake to insure proper penetration.
7. Spray all flashing and valley with brown, rust resistant paint.
8. Clean up all debris upon completion.
9. Take out all necessary permits and licenses.
10. These specifications are part of your contract, unless contract form states otherwise.